



devonshire *Park*

PHASE 4

ARCHITECTURAL GUIDELINES

July 2020

TABLE OF CONTENTS

TABLE OF CONTENTS.....	2
Overall Vision	4
Architectural Guidelines Objective.....	4
Architectural Vision	4
Single-Family & Duplex Guidelines.....	5
House Placement	5
Setbacks	5
Front Setback	5
Sideyard Setback.....	5
Unusual shaped or Pie-lots.....	5
Site Coverage.....	5
Grading	6
Retaining Walls.....	6
Garages.....	7
Driveways & Parking Pads	7
Sidewalks	7
General Requirements.....	8
Minimum House Sizes.....	8
House Widths.....	8
Standard Lots	8
Amenity & Rear Exposure Lots	8
Massing.....	8
Repetition	9
Exterior Design	9
Colours.....	9
Exterior Design Requirements.....	10
Architectural Styles.....	10
High Exposure Elevations	11
Parging.....	11
Roof Design & Pitch.....	11
Entries.....	12
Windows.....	12
Detailing	13
Duplex Lots	13
Townhouse Architectural Guidelines	13
Materials & Colours.....	14
Wall Finishes.....	14
Colours.....	14
Process of Approval.....	15

Review	15
Submission Process	15
Preliminary Architectural Approval	15
Conditional Final Architectural Approval	16
Final Colour Review	16
Final Approval	16
Revisions	16
Site Check	17
Building permit	17
Surveyor stakeout	17
Discretion	17
Contacts	18
Developer	18
Architectural	18
Appendix A	19
Imasco Stucco Beige Classification Chart	19

Overall Vision

Architectural Guidelines Objective

The general intent of the guidelines for the buildings in Devonshire Park is to maintain a consistent and high-quality street character and to protect property values in order to enhance future resale values.

Architectural Vision

The Architectural Vision for Devonshire Park is to transcend traditions with contemporary design by blending traditional architectural styles with modern urban detailing. Devonshire Park envisions a blend of complementary architectural styles that reflect the successes of the past, as well as introducing the best of contemporary design such as clean lines, shallower roof pitches, new building materials and design features. Offering a wide range of housing types that will cater to a variety of age groups and lifestyles, Devonshire Park will become a unique, vibrant community. The interpretation of the architectural guidelines will be based on the stated architectural vision and intent for the neighbourhood.

Note: The examples in this section are selected to illustrate style, detailing and proportions, and do not establish specific expectations concerning size, materials and finishes within the neighbourhood. Where elements within these architectural vision illustrations contradict specific guidelines, the letter of the guidelines will prevail. The illustrations may contain *certain elements that are not acceptable. The purpose of the illustrations below is to depict the intent rather than specify all the acceptable details or elements*



Single-Family & Duplex Guidelines

House Placement

Builders are to choose house designs that are suited to all the attributes of the lot. Builders are to review all available information and ensure the proposed house takes into account the lot size, lot location, site grading and view potential. Houses are expected to fill the lot width appropriately, avoid unnecessary use of retaining walls, provide a compatible relationship with adjacent houses and provide interesting and appropriate elevations in exposed locations.

Setbacks

Front Setback

- The developer's architectural consultant will review all front setbacks and adjust them at their discretion to provide articulation between the front of adjacent houses in an effort to create a more interesting streetscape with variety along the street.
 - Adjacent houses will not be permitted to have the same front setback.
 - Houses with greater massing will require increased setbacks to reduce their dominance on the street.
- Minimum front setback requirements from the property line:
 - The front yard setback shall range between 18'-0" and 22'-0" from property line. This requirement shall consider the setbacks of existing adjacent houses along the street.
 - Greater front yard setbacks will be required on corner lots.

Sideyard Setback

- The sideyard setback shall not exceed 5'-0" from the side property line.

General setbacks on all lots will be governed by the minimum setback requirement as per the City of Winnipeg by-law requirements.

Unusual shaped or Pie-lots

The architectural consultant will review the siting of all houses, ensuring the siting of houses on pie-lots are acceptable to the streetscape and compatible with adjacent houses. Builders are encouraged to choose house plans that can be centered on these lots with the greatest exposed frontage to the street.

Site Coverage

Total site coverage will be as per the City of Winnipeg by-law requirements.

Grading

- All Architectural Review Submissions must provide a plot plan with the following grades.
 - Top of Sub-floor Elevation
 - Rear Grade (Engineer provided rear grade will be accepted)
 - Front Step Grade
 - Front of Garage

These grades will be reviewed and adjusted at the architectural consultant's discretion to ensure that the grading design is harmonious with the site topography and neighboring houses.

- Houses are to maintain no more than 5 risers from the front grade to the main floor sub-floor. Exceptions will be made based on the discretion of the architectural consultant.
- Max 16% sideyard slopes will be required adjacent to the front of garage and veranda, based on site conditions and at the architectural consultant's discretion.
- Builders are responsible for ensuring the house type is suitable for the lot grading.
- Builders are to familiarize themselves with the engineering grade plan and ensure that drainage patterns are established on all lots that channel surface water away from the house on all side and into adjacent drainage swales and storm water systems.
- Grading and drainage patterns must coordinate with adjacent lots, no drainage across adjacent lots can occur unless provided for via easement pursuant to the City approved lot grading plan.
- Downspouts are to be positioned to direct water away from the house, to adjacent streets or side or rear drainage swales. Storm water cannot be directed onto adjacent lots.
- Driveway approach on public right of ways and driveway slopes must adhere to the requirements stated under Driveways & Parking pads on Page 8.

Retaining Walls

Builders are to choose houses that suit the lot grading and avoid unnecessary use of retaining wall.

- If retaining walls are required they will be entirely the responsibility of the builder.
- Builders are required to provide as built grades and self-resolve any grading disputes with adjacent properties.
- All retaining structures must be within property lines.
- Concrete wing walls will be acceptable when not visible from a street or public space.
- Any retaining wall exceeding 1.00 metre in height MUST be approved by a professional engineer and may require a development permit.
- Acceptable materials for retaining walls are:
 - Landscaping blocks (i.e. Alan block) or poured concrete with aggregate surface

Garages

Houses will be sited as per the proposed garage locations on the driveway and approach location plan.

Recommendations for alternate siting may be proposed at the preliminary approval stage if the house footprint and adjacent relationships warrant and if there are no conflicts with municipal or shallow utilities.

- Front drive houses shall have a minimum double attached garage.
- The wall finishes on the garage must echo the primary wall finishes of the house.
- The design of the garage shall echo the house design.
- On front drive lots, garages must be significantly detailed and harmoniously blend with the overall theme of the house.
- The maximum distance between the top of the garage door and the underside of the eave is to be 24" (excluding trim from calculation). Lowering the roofline, higher garage doors and/or additional detailing will be required when exceeding the maximum distance.
- When lot size permits, garages are to be offset to fill the lot width. (minimum 2')
- Houses with a garage that is no more than 2' in front of or behind the main front plane of the house will be encouraged.
- The garage door must: be painted to match the house colour or the predominant accent trim colour.
- Garage door glazing is not required if other detailing or design consideration is present at the discretion of the architectural consultant.

Driveways & Parking Pads

- Driveways shall be constructed with concrete or interlocking paving stone from the garage to the street pavement. The driveway and the approach shall be constructed at the same time.
- Driveway approach on public right of way will have a maximum 3% slope.
- Driveways will have a maximum 6% slope. Calculated from face of garage to property line.
- Gravel driveways/parking pads are prohibited.
- Driveway widths must not exceed the width of the garage doors by more than 2'-0".
- To ensure proper house configuration on individual lots, please refer to the driveway location plan for this area.
- On laned lots, a concrete garage pad for a detached garage is required as a minimum within 2 years of occupancy of the house. The concrete pad must be for a minimum of a single car garage and shall be set back a minimum of 4' from the rear property line.

Sidewalks

- Pre-cast concrete sidewalks are not permitted in front yards of front drive lots.

General Requirements

Minimum House Sizes

Minimum house sizes are established to ensure each house in the community provides a compatible presence with adjacent houses.

- The minimum floor area is the total floor area above grade.
- Developed basements, lower levels and garages are not included.

The following MINIMUM HOUSE SIZES apply to this area:

Lot Classification	Bungalows / Bi-Levels	Two Storey / Split Level / Cab-Over*
Laned	1000 sq. ft.	1350 sq. ft.
Front Drive	1200 sq. ft.	1500 sq. ft.

*Houses with a living area up to 5% less than the above stated minimums may be permitted provided that the front elevation detailing compensates for a smaller living area

House Widths

Houses are expected to utilize the lot width available to provide maximum frontage to the street.

Standard Lots

The house is required to fill the lot to meet the maximum 5'-0" sideyard requirement.

- The house width (excluding garage offset) must be maintained for the entire depth of the house on both floors.
- There will be a maximum 48" garage offset permitted.

Amenity & Rear Exposure Lots

The house is required to fill the lot to meet the maximum 5'-0" sideyard requirement.

- The house width (excluding garage offset) must be maintained for the entire depth of the house on both floors.
- There will be a maximum 24" garage offset permitted.

Massing


Houses in Devonshire Park will be primarily of 2 storey massing. To maintain a consistent streetscape, bungalows, bi-levels and cab-over houses will be permitted on a discretionary basis. In addition, cab-over houses will receive a review of massing and detailing by Genstar after the Architectural Consultant has reviewed the house. This will ensure that all cab-over houses meet the intent and vision for the community.

Three storey houses are acceptable on interior lots providing they meet all the by-law requirements for height. Three storey houses will not be permitted on corner lots.

Repetition

Exterior Design


To ensure suitable variety of all streetscapes, houses of the same or similar design and detailing will be separated. At minimum, 2 houses shall separate similar front elevations on the same side of the street. No similar front elevations are permitted on the lot directly across the street. However, any similar front elevations on the same street must have variation in their style regarding materials, roof styles, and architectural detailing.

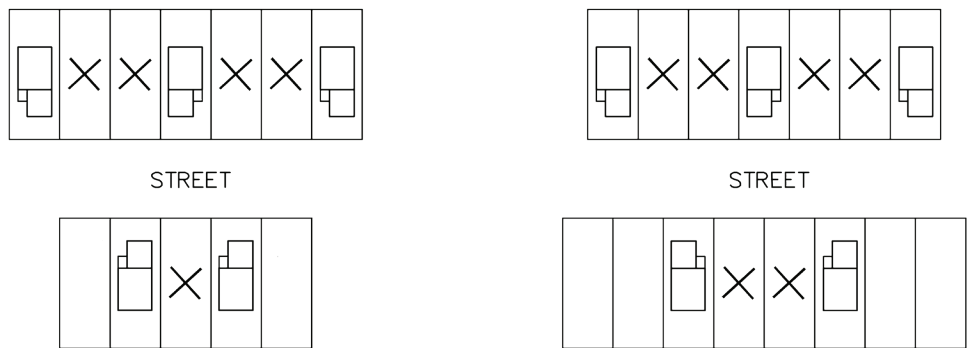

Colours

To further ensure houses offer an element of distinction on streetscapes separation will be required between colour schemes.

- Between similar colour schemes there must be a minimum of 1 house between on the same side of the street.
- Houses with significant differences in architectural style and design may be permitted, at the consultant's discretion, to have similar colour schemes in closer proximity than is typical. Front facades of a different colour or material than the main siding will be administered at the consultant's discretion in regard to colour repetition.
- In addition, in order to provide variety of colour no more than 2 beige main stucco colours will be permitted in a row. See Appendix A for the Imasco Stucco Beige Classification Chart.



STREET



Beige Repetition Diagram

Exterior Design Requirements

Architectural Styles

Devonshire Park envisions a blend of complementary architectural styles that reflect the successes of the past **Craftsman, Colonial, Arts & Crafts, Prairie and Tudor** styles coexisting with the best of **Modern and Contemporary** design. The exterior character of each house will be based on the strong, basic components of classic architectural styles OR the striking components of modern architecture. Contemporary details that promote a progressive, urban atmosphere will be incorporated into the exterior designs.



High Exposure Elevations

Special exterior design considerations shall be included on high exposure elevations. These elevations are to be treated with the same positions, materials and attention to detail as the design of the front elevations. Houses with high exposure elevations which includes rear exposure and corner lots (including rear) will require detailing on the exposed elevations that represents the overall style of the house and includes similar detailing to that on the front elevation. These elevations must include:

- Articulation of the wall face in the form of jogs, box-outs and /or cantilevers,
- Increased level of detailing including finishes, materials, trims and features similar to the front elevation and consistent with the style of the house,
- Exterior materials that are consistent with those used on the front elevation,
- Roof forms that match the front and provide variety to the rear streetscape, particularly backing onto ponds, parks and walkways,
- Rear decks are to be completed during construction of the house and are to be fully finished with all vertical, exposed surfaces painted to match exterior colour scheme.

Side Elevations



Rear Elevations



Parging

All high exposure elevations are to have minimal exposed parging and adhere to the maximum of 12" on the exposed front, side or rear elevations and maximum 24" on any other elevation.

Roof Design & Pitch

Rooflines will strongly represent the architectural style. Innovative roof forms that enhance a modern, urban fusion style will be encouraged.

- Roof pitch shall be a minimum of 5:12 for 2 storey buildings with 12" O.H.
- A minimum of 4:12 slope will be considered provided that the roof overhangs/soffits are a minimum of 24" wide.
- Min. 12" roof overhangs/soffits are required.
- Rooflines with lesser slopes will be considered on a case by case basis if the roofline is consistent with other elements of the house design and with adjoining properties.
- All cab-over style houses are required to have a raised, varied roofline over the front door to eliminate the "sloping" effect and monolithic roof mass.
- Monolithic roof masses should be avoided and replaced with stepped roof lines, dormers, or gable features to provide interest and variety along the street. Dormers may also provide an alternative to front / back vaults in living areas.
- Where there is a pitched roof and the dominant ridge line is parallel to the direction of the street, dormers or gable ends will be included in the roof design. Where the ridge line is perpendicular to the street, extensive architectural detailing such as material changes and windows are encouraged.
- Fireplace and furnace chimneys must be enclosed in a chase anywhere on the roof of the house. Chimney chases must be finished in a material that is appropriate to the aesthetic of the rest of the house and the metal flue must not project any more than 6 inches above the chase. This requirement applies for all fireplace, furnace, and chimney flues.

Entries

The main entrance of the house should be a prominent feature on the front facade and be properly proportioned to the overall massing of the house. Porches and covered entries are encouraged where possible.

- The front door must be flush to the front elevation of the house and fully visible from the street.
- Angled doors may be permitted when paired with a porch and well detailed large front window.
- The front door must incorporate side lights and/or additional detailing such as decorative window inserts, paneled, etc.
- Rich coloured doors that emphasize the entry are required.
- All steps at the front entry shall be concrete.
- Sidewalls adjacent to the front entry that exceed 10'-0" in total length require additional detailing such as a window or other acceptable treatments.

Windows

The window style should demonstrate a consistent design that enhances the overall architecture of the house.

- Front elevation windows shall be of significant size and demonstrate adequate detailing appropriate for the overall composition of the front elevation.
- Adequate window detailing (such as window shutters, architectural trim, muntin bars, etc.) are encouraged where appropriate to the design theme.
- SDL grilles will be highly recommended in modern window configurations.
- To ensure adequate visual framing of the windows by the exterior wall finishes on all elevations, the top edge of the exterior window frame detail and architectural trims must have a minimum of 6 inches clearance from the underside of the soffit or any other feature.
- Modern designs may make use of larger windows with no trim to achieve a more modern look if accompanied by appropriate detailing.

Detailing

Significant detailing of every house is required as outlined below.

In addition to the two front elevation materials, all houses are to incorporate a meaningful combination of the following detail features (using a minimum of 2 features) on the front elevation to the satisfaction of Genstar:

- Roof details (dormers, false beams, exposed trusses, etc.)
- Architectural Columns (heavy square piers or classic columns)
- Railings (simple or ornate railings on porch)
- Eaves detailing (overhang with dentils or brackets)
- Traditional elements such as front porches, shutters and vents
- Other features as deemed acceptable by Genstar

Duplex Lots

- Duplexes must have a minimum floor area 1100 sq. ft. per dwelling
- Duplex buildings must be two-storey structures on all front drive lots, but bungalows will be permitted on rear lane-access lots. All duplex buildings must be fully attached along the length of the party wall.
- Each unit/side must have compatible but different front elevation.
- Front drive duplex units must have a minimum of an attached single car garage for each unit/side.
- On laned duplex lots, a concrete pad for a detached garage is required within 2 years of house construction. A single car garage pad is acceptable.



Townhouse Architectural Guidelines

Townhouse design submissions will be reviewed on a case by case basis.

- Townhouse designs should incorporate the same architectural detailing and exterior requirements as described in Exterior Design Requirements of the Single Family and Duplex guidelines.
- Each unit of the townhouse should be unique yet still maintain compatibility with neighbouring units.



Materials & Colours

Wall Finishes

Material and Colour schemes will be reviewed with the following criteria: visual interest, contrast in colour scheme, contrast and harmony with neighbouring houses.

The exterior front facade of the house must be composed of a minimum of 2 complimentary materials including siding, brick, wood, stone, shakes, smart trim/Hardie board, stucco.

- Preference to cultured brick and/or cementitious or wood siding will be given over cultured stone.
- A predominantly stucco front elevation must have significant detailing and appropriate use of secondary materials. Any use of a different type of stucco as a secondary material will be provided with significant contrast in both texture and colour.
- Vinyl siding and stucco will only be allowed together as two (2) wall finishes if either the stucco is acrylic or the vinyl siding has a deep, rich colour to it.
- Houses with vinyl siding are required to have masonry accents and/or significant additional detailing designed to suit the architectural style of the house (i.e. shakes, batten, shutters, trim, brackets, etc.).
- Materials should wrap a minimum of 2'-0" around the corners of the house or to a suitable termination/transition location. If a hydro meter limits material placement, a reduction to the 2'-0" wrap-around can be made to accommodate the hydro meter on that that side of the house only.
- Masonry to be finished within 2" from grade. Builders are recommended to follow manufacturer's best practices for installation near grade, which may include a partial mix or full thinset style adhesive.
- Columns are to be masonry, composite wood, metal clad or an approved equivalent. Stucco and vinyl columns are prohibited.
- Trim material is to be composite wood, metal clad or an approved equivalent. Stucco trim (bump outs) are prohibited.

Colours

Bright, vibrant modern colour palettes will be encouraged in Devonshire Park. Large expanses of beige and white are prohibited. All exterior colour schemes must be detailed and submitted with plans for approval.

Colours for roof, face and trim must be coordinated for each unit to complement the individual house design and achieve a harmonious, visually attractive streetscape.

- Trim and fascia are integral to the appearance of the house. Provide contrast and harmony when selecting a colour for fascia, trim around windows and doors, etc.
- Colour schemes will be reviewed with the following criteria:
 - Visual Interest
 - Contrast in colour scheme (Houses that appear as plain beige boxes will be rejected.)
 - Contrast and harmony with neighbouring houses
- Garage doors must be painted to match the predominant siding colour or an acceptable complementary colour. White garage doors will only be permitted when the house has white trim.
- Front doors are required to be painted in an interesting, compatible contrasting colour. White front doors will not be permitted.

Process of Approval

Review

The purchaser shall review all lot information, marketing materials and the Guidelines prior to choosing a lot.

Submission Process

All submissions for architectural approval will be submitted online through the Streetscape™ Lot Management System. Access to Streetscape is available by invitation only and every user must have their own login on the system and must belong to a Group. There are several types of Groups on Streetscape™, each with their own special set of features and view of information. Some types of Groups include:

- Builder
- Developer
- Consultant

If your group is already setup then users are ready to Request Access. If your company is not yet setup as a Group, contact E2 + Associates directly through the E2 Contact Centre at **support@e2.associates** or by phone at (403) 256-5123 to setup account and inquire about Streetscape training session if required.

Information regarding the system and the various processes is available through the E2 Contact Centre at **support@e2.associates** or by phone at (403) 256-5123.

Preliminary Architectural Approval

It is strongly recommended that preliminary architectural approval submissions be made for each lot in order to avoid the unnecessary expense of revising drawings and/or client disappointment.

The Purchaser must submit the following to the Architectural Consultant for a preliminary architectural review:

- Professionally drawn working drawings in pdf format:
 - Floor plans
 - Foundation plans
 - Cross sections – complete with all dimensions from subfloors to footings and subfloors to front and rear grades
 - Four elevations – complete with all exterior materials clearly noted
- Plot Plan complete with builder's proposed setbacks, rear grade, front step grade, garage grade and subfloor elevation
- Optional - Preliminary Architectural Approval Form – complete with material and colour selections
- This information will be reviewed and returned along with design comments, suggested revisions, material and siting requirements

NOTE: Upon return of "the Preliminary Architectural Approval" the Purchaser is responsible for checking all information including the pre-approved plans, plot plans, grades and Preliminary approval form and contacting the consultant with any concerns or discrepancies before proceeding with construction and/or Conditional Final Approval.

Conditional Final Architectural Approval

The purchaser shall submit online the following to the Architectural Consultant for Conditional Final Architectural Approval:

- Professionally drawn working drawings in pdf format showing all revisions required at preliminary approval:
 - Floor plans
 - Foundation plans
 - Cross sections – complete with all dimensions from subfloors to footings and subfloors to front and rear grades
 - Four elevations – complete with all exterior materials clearly noted
- Plot Plan complete with required setbacks, rear grade, front step grade, garage grade and subfloor elevation requested at preliminary approval
- Optional - Preliminary Architectural Approval Form – complete with material and colour selections

NOTE: Upon return of “the Conditional Final Architectural Approval” the Purchaser is responsible for checking all information including the approved plans, plot plans, grades and final approval form and contacting the consultant with any concerns or discrepancies.

Final Colour Review

Application for Final Colour Review can take place as part the Application for Preliminary Architectural Approval or Conditional Final Architectural Approval. Otherwise the application for Final Colour Review will be completed separately after the Conditional Final Architectural Approval has been completed. The purchaser shall submit online the following to the Architectural Consultant for Final Colour Review:

- Final Architectural Approval Form – complete with material and colour selections

NOTE: Upon return of “the Final Colour Review” the Purchaser is responsible for checking the final approval form and contacting the consultant with any concerns or discrepancies.

Final Approval

When the Final Colour Review has been completed in conjunction with a Conditional Final Approval a Final Approval will be issued as part of the Final Colour Review process.

Revisions

The Purchaser shall contact the Design Consultant through StreetscapePLUS and obtain written approval for any revisions to the architectural approval before the revisions are applied.

Revisions after a Final Approval are subject to a fee charged directly to the builder.

Site Check

The Purchaser is responsible for checking the site, legal plan of survey, building grade plan, marketing map and title to the Lands for locations of:

- Light standards,
- Bus zones,
- Fire hydrants,
- Utility right of ways or easements for drainage,
- Catch basins,
- Transformer boxes or utility pull boxes,
- Restrictive covenants,
- Super mailboxes,
- Or other items which may affect the house design, siting, and the size or location of the driveway and report all problems to the Architectural Consultant in writing.

The Builder is to Document **in Photos** any lot damages after possession, prior to doing any work. All lot damages need to be submitted through Streetscape™.

Building Permit

The Purchaser shall apply for a building permit from the appropriate authority.

Surveyor Stakeout

When the approved plans are finalized and pre-approved by the Architectural Consultant, the Purchaser may proceed to stakeout the property.

Discretion

These requirements may be altered, amended or varied by the Vendor, Genstar Development Co., at its sole and absolute discretion and without prior notice. Genstar Development Co. and their designated consultants retain the full discretion to approve or disapprove any or all elements of a proposed development or structure. The vendor, the Architectural Consultant, their servants, agents, contractors, and appointees shall not be held responsible or liable for the accuracy, enforcement or compliance with these Landscape and Design Requirements to any Owner, Purchaser and/or Builder within the subdivision.

Genstar or E2 + Associates reserves the right to allow exceptions to the guidelines and shall not be liable for allowing such exceptions. Genstar or E2 + Associates reserves the right to review, comment and approve all plans, elevations and specifications, to ensure designs meet the overall vision. Genstar or E2 + Associates reserves the right to refuse building elevations that do not fit with the overall vision, at their sole discretion.

The same plans that are submitted to the E2 + Associates for approval must also be the plan submitted to the City of Winnipeg for a building permit. Any builders found to be in non-compliance with the Architectural Guidelines will be required to make alterations to the exterior in order to ensure they are met.

These guidelines are subject to change without notice and the Purchaser should contact Genstar to ensure they are referring to the most recent and up to date guidelines in effect at the time plan approvals are requested.

Contacts

Developer

Genstar Development Company

320 – 530 Kenaston Boulevard

Phone: (204) 488-6537

Marc Brown - Senior Development Manager

Email: MBrown@genstar.com | www.genstar.com

Architectural

E2 + Associates

300 – 4723 1st Street SW, Calgary AB T2G 4Y8

Phone: (403) 256-5123

Email: support@e2.associates | www.e2.associates

Appendix A

Imasco Stucco Beige Classification Chart	
46-1P Venus Light	139-1P Wiccan Earth
53-1P Balinese Dream	820-1P Pagan Stone
283-1P Bohemian Rose	25-1P Crème to le Cream
24-1P Arctic Berries	286-1P Southern Charm
134-1P Caribbean Breeze	Natural

This chart has been provided to specify which Imasco colors will be classified as beige for the intent of the beige stucco repetition rule.